




Available in Drilled or Blank Form

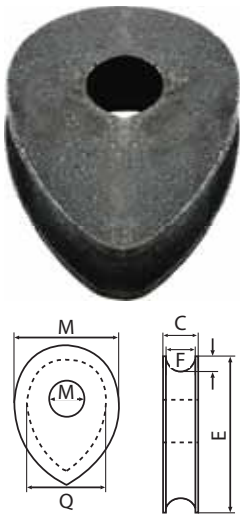

Product code	Rope Dia	Q	B	C	E	F	G	M (max)
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
I16240090	8	25	34	11	49	8	5	17
I16240091	10	32	44	14	57	11	6	18.5
I16240092	12	38	52	18	70	13	7	21.5
	14	44	60	21	82	14	8	22
I16240093	16	52	70	22	95	16	10	28.5
	18	57	78	25	105	19	11	28
I16240094	20	64	85	28	118	21	11	35.5
I16240095	22	70	95	32	127	22	13	38
I16240096	24	76	105	33	140	25	14	40
I16240097	26	82	115	36	152	26	16	43
I16240098	28	89	125	39	166	28	18	46
I16240100	32	102	140	44	192	33	19	52
I16240101	36	115	155	52	209	38	21	60
I16240102	38	127	172	57	234	41	22	-
I16240103	40	138	190	60	260	43	25	66
I16240104	44	140	200	64	280	44	29	70


SHACKLES, RIGGING EQUIPMENT & FALL PROTECTION



Tusker® Thimbles

Generally to BS 464

- Material: mild steel
- Finish: galvanized

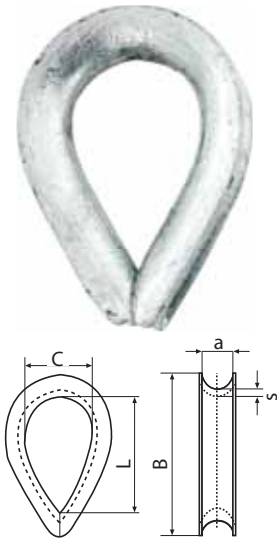

Product Code	Rope Dia	Groove Width	Overall Length	Inside Length	Inside Width	Back Thickness	Appox Mass
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
I16240067	3	4	26	21	13	1.6	0.8
I16240068	5	6	38	25	16	2.4	1.6
I16240069	6	7	44	28	18	2.4	1.9
I16240070	8	8	54	33	22	4	5.7
I16240071	10	10	64	38	25	4.8	7.6
I16240072	13	14	80	44	32	5.6	18.9
I16240073	16	16	98	59	41	7.9	34
I16240074	19	21	124	73	51	9.5	62.4
I16240075	22	22	133	83	57	9.5	75.6
I16240076	25	27	162	108	70	10.3	124.7
I16240077	28	29	178	111	76	12.7	151
I16240079	32	33	197	133	95	12.7	204
I16240080	35	38	229	152	105	15.9	318
I16240082	38	41	254	165	114	17.5	488
I16240083	41	43	254	165	114	17.5	499
I16240085	44	51	286	178	127	25.4	556
I16240086	47	60	318	191	133	28.6	-
I16240088	50	64	330	203	140	28.6	-