



# Tusker® Chain Blocks (YB)


CHAIN HOISTS & TROLLEYS



### Features:


- Standard with double pawl
- 0.5 tonne to 20 tonne lifting capacity
- Steel Formed cases
- Overload protection device (optional with extra cost)
- Heavy duty brake mechanism
- Double cover protection
- Load chain guide and stripper
- Powder metal bushes
- Slack end anchorage
- Grade 1000 load chain

Model	Capacity (Ton)	Lift (m)	Load Chain		Hand Chain	Head-room H(mm)	Hand Chain Pulling per Lift Meter (mm)	Hand Effort to Lift Full Load (kgf)	Test Load (Ton)	N.W. (kg)
			Dia x Pitch (mm)	No. of Falls	Dia x Pitch (mm)					
YB - 050	0.5	2.5	5 x 15	1	5 x 23.6	275	34.7	23	0.65	9
YB - 100	1	2.5	3.6 x 19	1		300	57.5	27	1.25	11.4
YB - 160	1.6	3	7.1 x 21	1		410	67	38	2	18
YB - 200	2	3	8 x 24	1		450	84.2	38	2.5	21
YB - 300	3	3	7.1 x 21	2		530	134	38	3.75	24
YB - 320	3.2	3	10 x 30	1		535	136.1	45	3.75	30
YB - 500	5	3	10 x 30	2		675	272.3	38	6.25	45
YB - 750	7.5	3	10 x 30	3		810	408.4	40	9.38	84
YB - 1000	10	3	10 x 30	4		870	544.5	35	12.5	95
YB - 1500	15	3	10 x 30	6		1120	408.4	44	18.75	
YB - 2000	20	3	10 x 30	8		1320	544.5	46	25	

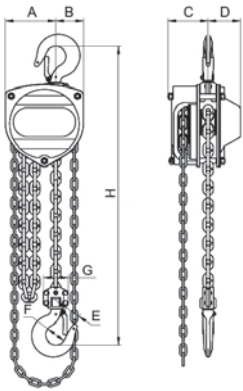

### Dimensions:

WLL (Tonne)	Dimensions (mm)						
	A	B	C	D	E	F	G
YB-050	89	46	99	65	28	35	51
YB-100	100	52	96	69	36	43	53
YB-160	114	59	100	75	38	48	62
YB-200	132	71	101	83	40	52	64
YB-300	155	55	94	75	50	60	111
YB-320	169	92	113	90	50	60	69
YB-500	220	70.5	113	90	60	67	134
YB-750	287	126	113	90	65	85	166
YB-1000	287	126	113	90	65	85	286



### Dimensions:

WLL (Tonne)	Dimensions (mm)							
	A	B	C	D	E	F	I	J
YB-1500	372	372	104	90	90	120	438	160
YB-2000	445	450	104	90	115	150	590	170

