

EMH Wire Rope Hoists

Dimensions and Specifications

Hoist Model: EM 3000E
Trolley Type: Monorail for Single Girder Cranes

Reeving: 2 to 1

Capacities: 5 tons


Rope Diameter (mm):	11
Drum Diameter:	10.75"
Sheave Diameter:	9.125"
Hoist Motor HP:	12.4/2.0
Trolley Motor HP:	0.6/0.15
Trolley Wheel Diameter:	6.25"
Speeds (fpm)	32/5.2, 40/6.4, 50/8.2
Trolley Speed (fpm):	63/16

Duty Service Classification		FEM	HMI
Capacity in US Tons	5	2	H4

Dimensions (inches):		
Refer to drawing below. C, M and R dimensions shown in adjacent tables.	A:	23.25
	B:	24
	G:	15.125
	H:	10.5
	I:	6.25
	K:	5.375
	L:	16.875
	N-Min:	5
	N-Max:	20
Maximum Flange Thickness:		1.535

Available Lifts (ft):				
M, R and Wt. vary with lift		M (in.)	R (in.)	Wt. (lbs.)
	40	6.75	33	2280
	65	11.25	43.75	2400
	100	16.75	55.875	2530

C Dimension - inches:			
Varies with flange width (N)	N<12"	12"<N<16"	N>16"
	25.625	27.625	32.25

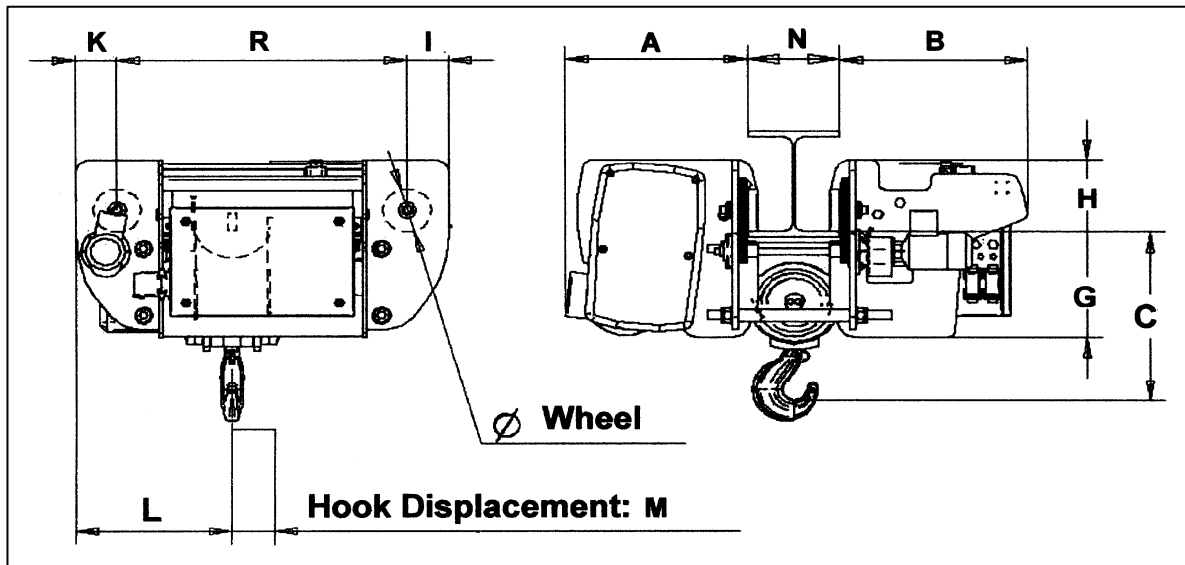

E·M·H
Engineered Material Handling